
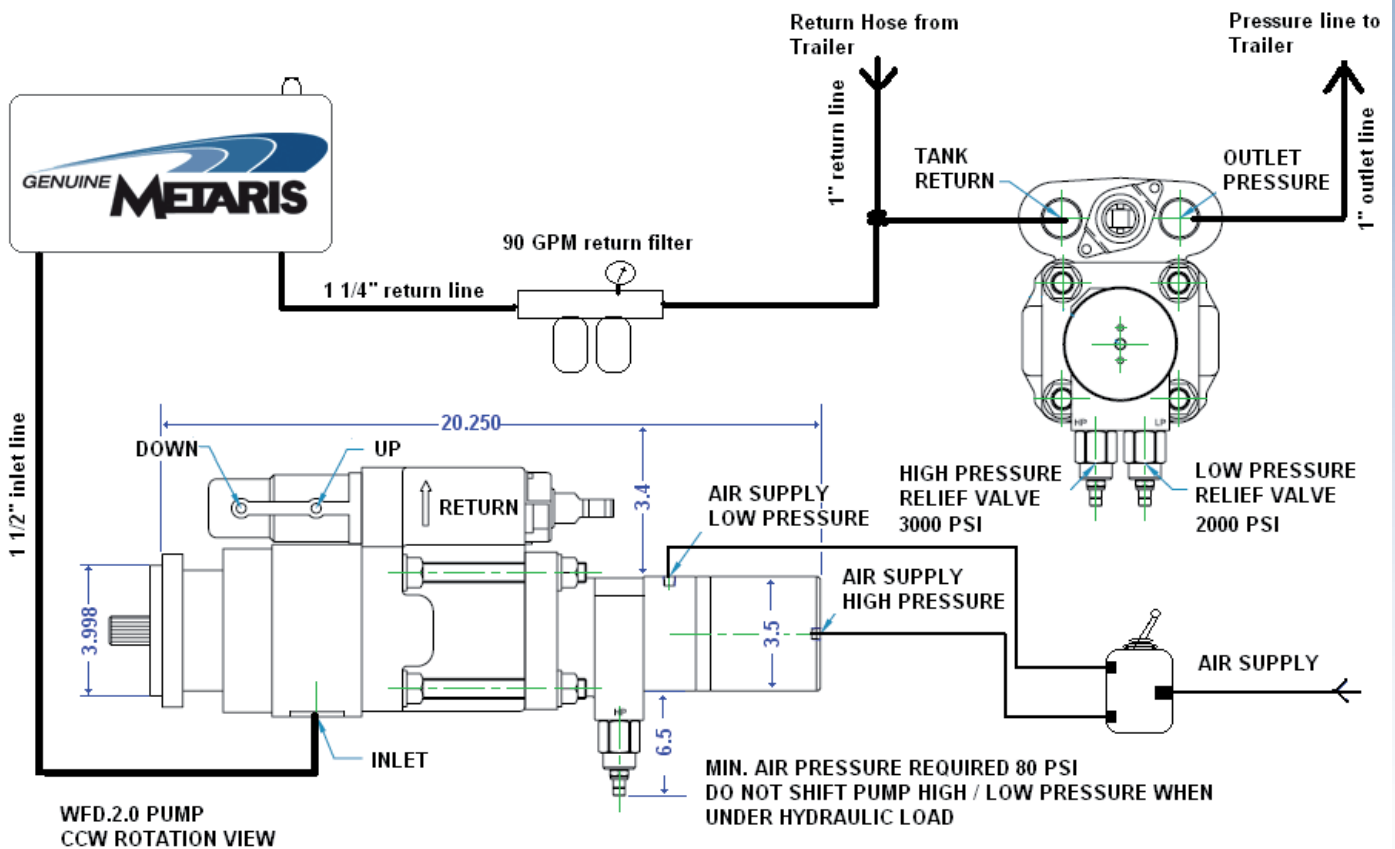


# DUAL PRESSURE DUMP PUMP 2.0

- Two relief pressures on this pump: High pressure (3000 psi) for walking floor application and low pressure (2000 psi) for dump applications. They are set at the factory and should not be adjusted.
  - Air pressure must be 80 psi minimum to operate the high/low pressure relief air cylinder.
  - The dual pressure dump pump comes with directional control valve.
  - Pump displacement is 5.10 cir and comes set up as a 3 line system only.
  - Pump comes complete with Toggle switch used to switch between high and low pressure and a pump mounting support bracket.
- 
- The PTO is required to operate at 130% of the engine speed. In most applications the engine RPM is 1000 to 1200 rpm. When equipped with a Metaris PTO this will be a "C" or "E" ratio.



## Metaris Inc. - Canada & International

101 Canartic Dr., Toronto, ON Canada M3J 3N1  
Tel: (416) 638-6000 or 888-477-2737  
Fax: (416) 638-9362 or 866-638-9365  
Email: sales@metaris.com

## Metaris Corp. - USA

1519 Hwy 35 North, Forest, Mississippi U.S.A. 39074  
Tel: (601) 469-1987 or 800-962-2703  
Fax: (601) 469-2120 or 800-654-5083  
Email: sales@metarisusa.com



[WWW.METARIS.COM](http://WWW.METARIS.COM)